FORM PTO-1390 (Modified) (REV 11-2000) U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER: **15028**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR): **Unassigned 10/018596**

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/EP00/03857	**28 April 2000 (28.04.00)**	**30 April 1999 (30.04.99)**

TITLE OF INVENTION

MEMBRANE PUMP HAVING AN INLET OPENING CONTROLLED BY MEANS OF THE MEMBRANE

APPLICANT(S) FOR DO/EO/US

Gerhard Rinninger and Oswald Seibold

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include itens (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
   a. ☐ is attached hereto (required only if not communicated by the International Bureau).
   b. ☒ has been communicated by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
   a. ☒ is attached hereto.
   b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
   a. ☐ are attached hereto (required only if not communicated by the International Bureau).
   b. ☐ have been communicated by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Two (2) Sheets of Drawings
Assignee: ASF THOMAS INDUSTRIES GMBH of Puchheim, Germany

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
10/018596 Unassigned	PCT/EP00/03857	15028

24. The following fees are submitted:.	CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :		
☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **$1040.00**		
☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **$890.00**		
☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **$740.00**		
☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) **$710.00**		
☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) **$100.00**		
ENTER APPROPRIATE BASIC FEE AMOUNT =	**$890.00**	
Surcharge of **$130.00** for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).	**$130.00**	

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	* 9 - 20 =	0	x $18.00	**$0.00**	
Independent claims	* 1 - 3 =	0	x $84.00	**$0.00**	
Multiple Dependent Claims **(check if applicable).**			☐	**$0.00**	
TOTAL OF ABOVE CALCULATIONS =				**$1,020.00**	
☐ Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				**$0.00**	
SUBTOTAL =				**$1,020.00**	
Processing fee of **$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). +				**$0.00**	
TOTAL NATIONAL FEE =				**$1,020.00**	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) **(check if applicable).** ☐				**$0.00**	
TOTAL FEES ENCLOSED =				**$1,020.00**	
Amount to be: refunded					$
charged					$

* Claim calculation based on claims amended by Preliminary Amendment being filed concurrently herewith

a. ☒ A check in the amount of **$1,020.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **19-1013/SSMP** A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Leopold Presser
Registration No. 19,827
SCULLY, SCOTT, MURPHY & PRESSER
400 Garden City Plaza
Garden City, NY 11530
(516) 742-4343

SIGNATURE

Leopold Presser
NAME

19,827
REGISTRATION NUMBER

October 30, 2001
DATE

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Gerhard Rinninger, et al.	**Examiner:**	Unassigned
Serial No:	Unassigned	**Art Unit:**	Unassigned
Filed:	Herewith	**Docket:**	15028
For:	MEMBRANE PUMP HAVING AN INLET OPENING CONTROLLED BY MEANS OF THE MEMBRANE	**Dated:**	October 30, 2001

Assistant Commissioner of Patents
United States Patent and Trademark Office
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

In connection with the filing of the above-identified application, kindly enter the following Preliminary Amendment.

CERTIFICATE OF MAILING BY "EXPRESS MAIL"
Express Mailing Label No.: EL 913702404 US
Date of Deposit: October 30, 2001

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents and Trademarks, Washington, D.C. 20231 on October 30, 2001.

Dated: October 30, 2001

Michelle Mustafa

In the Claims:

Please delete claims 1-9 and replace with new claims 11-19 as follows:

11. (New) A membrane pump having a membrane which can be actuated by a crank drive, which membrane bounds, together with a concave pump body surface, a pump chamber, an inlet channel and an outlet channel which open out at an inlet opening and an outlet opening in the pump body surface, the membrane having a membrane core and an elastically deformable membrane ring and the membrane core having a convex surface adapted to the pump body surface, whereby the inlet opening is arranged in a region of the pump body surface which the membrane first approaches upon an expulsion stroke of the crank drive and the elastically deformable membrane ring closes the inlet opening before the attainment of top dead center of the crank drive, wherein an inlet valve is provided which is arranged in the region of the inlet opening of the inlet channel.

12. (New) The membrane pump according to claim 11, wherein the inlet valve has a valve plate which covers over the inlet opening.

13. (New) The membrane pump according to claim 11, wherein there is formed in the edge region of the inlet opening a surrounding control edge against which the elastically deformable membrane ring closes the inlet valve.

14. (New) The membrane pump according to claim 11, wherein the middle point of the inlet opening lies at least approximately in the plane of rotation of the crank of the crank drive.

15. (New) The membrane pump according to claim 11, wherein the elastically deformable membrane ring closes the inlet opening at a crank rotary position of the crank drive which is up to 90° before top dead center.

16. (New) The membrane pump according to claim 15, wherein the elastically deformable membrane ring closes the inlet opening at a crank rotary position of the crank drive which is 20° to 90° before top dead center.

17. (New) The membrane pump according to claim 11, wherein the middle axis of the inlet channel is orientated perpendicularly to the pump body surface.

18. (New) The membrane pump according to claim 11, wherein the outlet opening of the outlet channel is arranged in a region of the pump body surface which the membrane approaches last and which is attained by the membrane at the earliest at top dead center of the crank drive.

19. (New) The membrane pump according to claim 11, wherein the middle point of the outlet opening of the outlet channel is arranged in an inner region of the pump body surface which lies opposite to the membrane core of the membrane.

REMARKS

As originally amended pursuant to PCT Article 34, claims 3-9 did not comply with the multiple dependent claims style specified by U.S. law. The amendments submitted above have been made to delete all multiple dependent claims.

It is respectfully requested that the above amendments be entered before an action on the merits is issued.

Respectfully submitted,

Leopold Presser
Registration No. 19,827

Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, NY 11530

LP:dg

PCT WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 7 : F04B 45/04, 43/00 — A1

(11) Internationale Veröffentlichungsnummer: **WO 00/66891**

(43) Internationales Veröffentlichungsdatum: 9. November 2000 (09.11.00)

(21) Internationales Aktenzeichen: PCT/EP00/03857

(22) Internationales Anmeldedatum: 28. April 2000 (28.04.00)

(30) Prioritätsdaten:
199 19 908.6 30. April 1999 (30.04.99) DE

(71) Anmelder *(für alle Bestimmungsstaaten ausser US)*: ASF THOMAS INDUSTRIES GMBH [DE/DE]; Siemensstrasse 4, D–82178 Puchheim (DE).

(72) Erfinder; und
(75) Erfinder/Anmelder *(nur für US)*: RINNINGER, Gerhard [DE/DE]; Lerchenweg 3, D–87666 Pforzen (DE). SEIBOLD, Oswald [DE/DE]; Klessingweg 27, D–80997 München (DE).

(74) Anwalt: KÖRBER, Martin; Mitscherlich & Partner, Sonnenstrasse 33, D–80331 München (DE).

(81) Bestimmungsstaaten: JP, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht
Mit internationalem Recherchenbericht.

(54) Title: MEMBRANE PUMP COMPRISING AN INLET OPENING THAT IS CONTROLLED BY THE MEMBRANE

(54) Bezeichnung: MEMBRANPUMPE MIT EINER DURCH DIE MEMBRANE GESTEUERTEN EINLASSÖFFNUNG

(57) Abstract

The invention relates to a membrane pump (1) comprising a membrane (24) which can be actuated by a crank drive (32) and which, together with a concave pump body surface (8), encloses a pump chamber (38). The inventive membrane pump also comprises an inlet channel (4) and an outlet channel (17) which open into the pump body surface (8) at an inlet opening (9) and an outlet opening (20) respectively, whereby the membrane (24) has a membrane core (25) and an elastically deformable membrane ring (26), and the membrane core (25) has a convex surface that is adapted to the pump body surface (8). The inlet opening (9) is arranged in an area of the pump body surface (8) toward which the membrane (24) firstly approaches during a discharge stroke of the crank drive (32). The elastically deformable membrane ring (26) seals the inlet opening (9) before the crank drive (32) reaches the upper dead center.

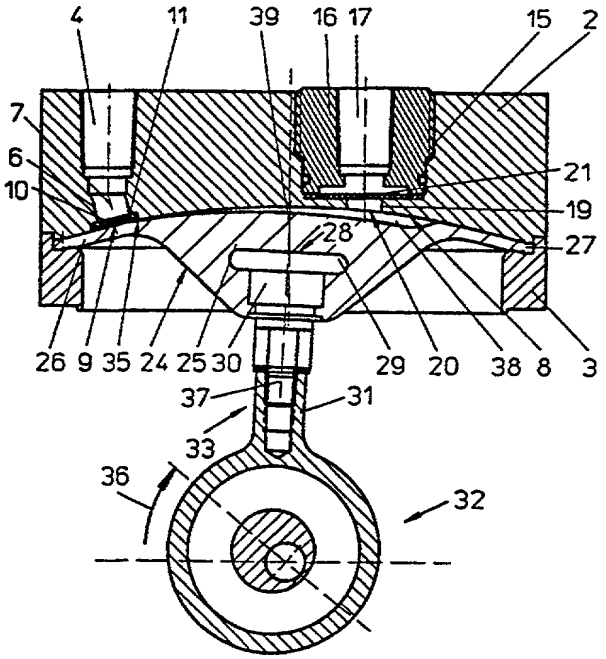

(57) Zusammenfassung

Eine Membranpumpe (1) mit einer von einem Kurbelantrieb (32) betätigbaren Membrane (24), die zusammen mit einer konkaven Pumpenkörperfläche (8) einen Pumpraum (38) einschließt, einem Einlaßkanal (4) und einem Auslaßkanal (17), die an einer Einlaßöffnung (9) und einer Auslaßöffnung (20) in die Pumpenkörperfläche (8) münden, wobei die Membrane (24) einen Membrankern (25) und einen elastisch verformbaren Membranring (26) aufweist, und der Membrankern (25) eine an die Pumpenkörperfläche (8) angepaßte, konvexe Oberfläche aufweist. Dabei ist die Einlaßöffnung (9) in einem Bereich der Pumpenkörperfläche (8) angeordnet, dem sich die Membrane (24) bei einem Ausstoßhub des Kurbelantriebs (32) zuerst nähert und der elastisch verformbare Membranring (26) verschließt die Einlaßöffnung (9) vor dem Erreichen der oberen Totpunktstellung des Kurbelantriebs (32).

Membrane pump having an inlet opening controlled by means of the membrane

The invention proceeds from a membrane pump in accordance with the preamble of the main claim.

From German Utility Model G 94 06 216 there is known a membrane pump in accordance with the preamble of claim 1. The membrane pump of this utility model has a membrane which can be actuated by crank drive, which membrane is attached at an outer membrane circle ring to a pump body of a pump housing. Along with the outer membrane circle ring, the membrane has a membrane core which is connected with the outer membrane circle ring via an elastically deformable membrane ring. The membrane, with a pump body surface formed on the pump body, bounds a pump chamber (compression/expansion chamber). An inlet channel and an outlet channel are formed in the pump body, which open out at an inlet opening and an outlet opening in the pump body surface. The inlet channel and the outlet channel are, outside the pump body, preferably connected with directional valves, by means of which one direction of flow is predetermined through the inlet channel and the outlet channel. Upon a suction stroke of the crank drive, a pump medium is transported through the inlet channel into the pump chamber and upon a following expulsion stroke of the crank drive the pump medium is displaced out of the pump chamber via the outlet channel.

Disadvantageous with the membrane pump known from German Utility Model G 94 06 216 is that during the expulsion stroke a part of the pump medium located in the pump chamber is pressured back or compressed into the inlet channel. In particular in the case of a compressible pressure medium, for this reason the efficiency of the membrane pump significantly worsened. A further

disadvantage is that the outlet opening is choked in dependence upon the stroke position of the crank drive, the choking increasing before attainment of the top dead center position of the crank drive, so that at the end of the expulsion stroke the highly compressed pump medium can increasingly poorly escape.

Summarizing, with the known membrane pump a quantity of pump medium corresponding to the compression ratio of the membrane pump cannot be completely expelled out of the pump chamber via the outlet opening. Further, the known membrane pump is suitable only to a limited degree for compressible pump mediums such as for example gases.

The object of the present invention is to propose a membrane pump which avoids the disadvantages of the state of the art and allows a compression ratio of the pump medium located in the pump chamber which is as great as possible.

The object is achieved by means of the membrane pump in accordance with the invention having the characterizing features of the main claim. Advantageous developments of the invention are indicated in the subclaims.

The membrane pump in accordance with the invention has the advantage that the inlet opening of the inlet channel is already closed during the explosion stroke of the crank drive, so that a further compression of a pump medium takes place only in the pump chamber and the pump medium can be expelled completely via the outlet channel.

It is advantageous when the middle point of the inlet opening lies at least approximately in the plane of rotation of the crank of the crank drive. By these means, the inlet opening of the inlet channel is closed at a particularly early time point.

It is advantageous when a surrounding control edge is formed in the edge region of the inlet opening, on which control edge the elastically deformable membrane ring closes the inlet opening. By these means the inlet opening is reliably closed on all sides.

In an advantageous manner, the elastically deformable membrane ring closes the inlet opening with a crank rotary position of the crank drive which is up to 90° before top dead center. By these means, from a maximum deflection of the membrane of the membrane pump, sealing off is attained.

In advantageous manner, the elastically deformable membrane ring closes the inlet opening at a crank rotary position of the crank drive which lies 20° to 90° before top dead center. By these means a sealing of the inlet opening of the inlet channel is attained from a maximum deflection of the membrane of the membrane pump, whereby with a closed inlet opening of the inlet channel a part of the crank rotation is available in order to attain a greater compression of the pump medium.

It is of advantage when a valve plate is arranged in a region of the inlet opening of the inlet channel for forming a directional valve. In that the valve plate is arranged directly at the inlet opening of the inlet channel, the dead volume of the inlet channel can be further reduced. Thereby it is particularly advantageous when the middle axis of the inlet channel is orientated perpendicularly to the pump body surface. By these means the structural configuration of the directional valve and the emplacement of the valve plate in the inlet channel is simplified.

In an advantageous manner, the outlet opening of the

outlet channel is arranged in a region of the pump body surface which the membrane last approaches and which is attained by the membrane at the earliest with the top dead center position of the crank drive. Thereby it is achieved that the pump medium can be pumped out of the pump chamber into the outlet channel as far as possible unchoked. Further, it is achieved that the outlet opening of the outlet channel is not already closed before the attainment of the top dead center position of the crank drive.

It is of advantage when the middle point of the outlet opening of the outlet channel is arranged in an inner region of the pump body surface which lies opposite to a membrane core of the membrane. Since upon the crank movement of the crank drive, the pump medium is pumped last out of the region the pump chamber arranged above the membrane core of the membrane, as a result of the movement of the membrane core, the outlet opening of the outlet channel is thereby particularly favourably arranged.

Exemplary embodiments of the invention are described in more detail in the following description and illustrated in a simplified manner in the drawings, which show:

Figure 1 an axial section through an exemplary embodiment of a membrane pump in accordance with the invention, in the top dead center position of the crank drive;

Figure 2 the exemplary embodiment in a crank rotary position which lies 50° after the top dead center position;

Figure 3 the exemplary embodiment in the bottom dead center position; and

Figure 4 the exemplary embodiment in a crank rotary

position of the crank drive which lies 50° before the top dead center position.

Description of the exemplary embodiments

Figure 1 shows a partly sectional representation of the membrane pump 1 in accordance with the invention. The membrane pump 1 can in particular be employed as a vacuum pump or as a pressure pump for transporting pump media, e.g. liquids and gases. The membrane pump 1 in accordance with the invention is, however, suitable also for other applications.

The membrane pump 1 has a pump body 2 which is connected with a housing element 3. The pump body 2 has an inlet channel 4, which in this exemplary embodiment is formed by means of stepped bores 5a, 5b, 5c and an oblique bore 6. Thereby, a middle axis 7 of the oblique bore 6 of the inlet channel 4 as orientated perpendicularly to a pump body surface 8 formed on the pump body. The inlet channel 4 opens out at an inlet opening 9 in the pump body surface 8. The inlet opening 9 is arranged in an outer region of the pump chamber, i.e. in the vicinity of the mounting of the membrane in the pump body 2. Furthermore, the middle point of the inlet opening 9 advantageously lies in the turning or pivoting plane of the crank 31 of the crank drive 32. It is to be remarked that the pivot plane of the crank 31 coincides with the sectional plane of Figure 1. By means of the arrangement of the inlet opening in an outer region of the pump chamber and in the pivot plane of the crank 31 there is attained an early closing of the inlet opening 9 upon expulsion of the pump medium out of the pump chamber by means of the membrane. From the point of early closure of the inlet opening 9, the pump medium is no longer transported via the inlet channel 4 into the pump chamber. The inlet channel is from this point in time no longer effective as undesired dead space. By these

means there is thus obtained an improvement and optimization of the pump process.

In the region of the inlet opening 9, i.e. directed towards the pump chamber, there is arranged a directional or inlet valve. The inlet valve consists, in the illustrated exemplary embodiment, of a valve plate 10, which is arranged in the region of the inlet opening 9 of the inlet channel 4 for forming the directional valve or inlet valve 4. In the region of the inlet opening 9 the oblique bore 6 of the pump body 2 has a surrounding pocket directed towards the pump chamber, which pocket has a greater diameter than the oblique bore 6. The valve plate 10 bears on a surrounding edge 11 formed between the oblique bore 6 and the pocket. The valve plate 10 is aligned in substance with the pump body surface 8, at least whilst it is closed by the membrane, whereby there is provided between the surrounding groove in the oblique bore 6 and the pump body surface 8 a control edge 35. In other words, there is formed in the edge region of the inlet opening 9 a surrounding control edge 35 which projects slightly over the valve plate 8, on which control edge the membrane closes the inlet opening 9. The surrounding control edge 35 ensures, in an advantageous manner, that the inlet valve with the valve plate 10 is securely and reliably closed on all sides upon an expulsion stroke. The arrangement of the inlet valve with a valve plate 10 directly in the region of the inlet opening 9, and the direct closing of the inlet valve by means of the membrane in the case of an expulsion stroke, further reduces the undesired dead space upon an expulsion stroke and therewith contributes to a further increase of the efficiency and reliability of the pump.

In the pump body 2, an outlet element 16 is screwed in, at a thread 15, which outlet element has stepped bores 18a to 18d, which together with an outlet recess 19 form an

outlet channel 17. The outlet element may also be inserted and fixed by means of screws. The outlet channel 17 opens out in an outlet opening 20 in the pump body surface 8. Between the outlet recess 19 and the bore 18d a directional valve is formed by means of a valve plate 21. The outlet valve with the valve plate 21 is arranged in the region of the outlet recess 19 directed towards the pump chamber, whereby a further improvement of the pump effect is attained. The outlet opening 20 is arranged offset from the edge of the pump chamber towards the middle such that the outlet opening 20 is closed as late as possible upon an expulsion stroke. In other words, the outlet opening 20 is arranged in a region which is last covered over by the membrane at the end of the outlet stroke.

Both the inlet valve having the valve plate 10 and also the outlet valve having the valve plate 21 are advantageously formed as freely movable valves, which switch with the slightest possible pressure differences, in order to avoid compression losses and thus an indirect increase in undesired dead space. The valves are not pre-biased in any direction by means of a mounting or connection, which would mean that additional forces for switching the valves would be necessary, but they are formed to be freely movable. So that however, after lifting from their valve seat, i.e. after opening, upon ending of the flow process, the valves are carried back to their respective seats as free from tensions as possible, there is provided an appropriately form valve holder device. Thereby it is important both in the case of the inlet valve and in the case of the outlet valve that the mountings of the valve plates 10 and 21 are tension free, i.e. in the vicinity of the closed valve position the valve is as tension free as possible, so that slight pressure differences suffice for closing and also for opening. Upon deflection, upon opening of the valve there

arise tensions in the valve through which it is pre-biased in the direction towards the closed position. In the present exemplary embodiment there are provided for this purpose for the inlet valve two bolts having a thin retaining collar to both sides the inlet opening 9. The inlet valve has elongate or oval attachment bores, through which the bolts pass. Upon opening of the valve, the valve plate is thus movable along the bores and makes possible a bending out inwardly into the pump chamber. Similar is attained in the case of the outlet valve by means of the bore 18d in the outlet element 16. The bore 18d is preferably a surrounding groove which is formed in the outlet element 16 facing towards the seat of the valve plate 21 and makes possible for the valve plate 21 a free opening movement away from the pump chamber.

The membrane has a membrane core 25, an elastically deformable membrane ring 26 and an outer membrane circle ring 27, whereby the membrane 24 is attached to the outer membrane circle ring 27 between the pump body 2 and the housing element 3. In the non-mounted condition, the membrane is substantially flat and is so mounted between the pump body 2 and the housing element 3 that the membrane is pre-biased in the direction towards the pump body surface 8. For this purpose the membrane is mounted spherically tangentially, as can be recognized from Figures 1 to 4. For this purpose the concave pump body surface 8 is continued also into the region of the mounting of the membrane circle ring 27, so that at least in the outer region, i.e. in the region of the membrane circle ring 21, the membrane bears on the edge regions of the concave pump body surface 8. By these means there is also ensured a reliable closure of the inlet valve by means of the membrane. The spherical-tangential mounting of the membrane avoids the flat ring-shaped undesired dead space commonly present in the region of the membrane mounting with known pumps, which undesired space results

from an insufficient flexibility of the membrane and the pressure build-up in the pump upon the outlet procedure and following therefrom the bulging of the membrane away from the pump chamber. The membrane pump in accordance with the invention is so conceived that the compression ratio, i.e. the ratio of maximum to minimum pump chamber volume, is optimized. Since the compression ratio is dependent in particular upon the minimum attainable pump chamber volume and thus is determined by how well the elastic membrane can close off the pump chamber, there is attained by means of the above described characteristic of the membrane pump in accordance with the invention an optimization in this regard. Further, by means of the arrangement and configuration of the inlet valve and the outlet valve, the volumes in the flow channels are minimized, so that a strongly improved pump effect is provided. A mold core 28 is vulcanized into the membrane core 25 of the membrane 24, which core has a plate-shaped section 21 and a cylinder-shaped section 30. Via a connection device 31, the cylinder-shaped section 30 of the mold core 28 is connected with a crank 31 of a crank drive 32.

As mentioned above, in the edge region of the inlet opening 9 there is formed a surrounding control edge 35, at which the elastically deformable membrane ring 26 closes the inlet opening 9.

In Figures 2 to 4 the exemplary embodiment of the membrane pump of Figure 1 is illustrated with different crank rotary positions of the crank drive. By considering Figures 1 to 4 one after another an impression of the movement process of the membrane pump 1 can be obtained. Thereby, in Figure 1 the crank rotary position of the membrane pump is shown at top dead center, in Figure 2 50° after top dead center, in Figure 3 at bottom dead center and in Figure 4 50° before top dead center. Since the

elements illustrated in Figures 2 to 4 correspond to the elements of Figure 1, a repeat description will not be given.

In Figure 2, the crank rotary position of the crank drive 32 is illustrated after a rotation of the crank drive 32 in a direction of rotation 36 by 50°. Thereby, the axis 37 of the membrane core is tilted with respect to the axis 39 of the concave pump body surface 8. Thereby the membrane core 25 first lifts from the pump body surface 8 on the side of the inlet opening 9, whereby in the region of the outlet opening 20 it initially remains in contact with the pump body surface 8. In this exemplary embodiment, the inlet opening 9 of the inlet channel 4 is, with the crank rotary position illustrated in Figure 2, closed by the elastically deformable membrane ring 26 of the membrane 24. The membrane ring 26 and/or the pump body surface 8 may also be so formed that the inlet opening 9 of the inlet channel 4 is already open with the crank rotary position of the crank drive 32 shown in Figure 2. In general, with a crank rotary position of the crank drive 32 which is 90° after top dead center, the inlet opening 9 of the inlet channel 4 is open. Due to the rotary crank movement of the crank drive 32, the membrane 24 lifts itself from the pump body surface 8, whereby a pump chamber 38 formed between the membrane 24 and the pump body surface 8 increases in size and after the opening of the inlet opening 9 of the inlet channel 4 a pump medium is sucked in out of the inlet channel 4 through the inlet opening 9 into the pump chamber 38. Upon sucking in of the pump medium out of the inlet channel 4 into the pump chamber 38, the pump medium flows through the directional valve formed by the valve plate 10. Likewise, in the outlet channel 17 there is formed by means of the valve plate 21 a directional valve so that pump medium present on the side of the sealing plate 21 away from the outlet opening 20 does not flow back into the pump chamber 38

upon a suction stroke of the crank drive 32.

In Figure 3, the membrane pump 1 is illustrated at a bottom dead center position of the crank drive 32. With respect to the top dead center position of Figure 1, the crank drive 32 of the membrane 1 has completed a rotation in the direction of rotation 36 by 180°. In this position there is provided a volume of the pump chamber 38 which is at least approximately maximum. The membrane 24 thus bears on only in the region of the outer membrane circle ring 27 at which the membrane is connected with the pump body 2 and the housing element 3. Thereby, the inlet opening 9 of the inlet channel 4 and the outlet opening 20 of the outlet channel 17 are completely open.

Following the rotary crank position of the membrane pump 1 shown in Figure 3 there is an expulsion stroke of the membrane 24, whereby the pump medium in the pump chamber 38 is compressed and expelled out of the membrane pump 1 via the outlet opening 20 of the outlet channel 17. Thereby it is attained by means of the valve plate 10 that the pump medium does not flow back out of the pump chamber 38 into the inlet channel 4.

With increasing expulsion stroke, the membrane 24 approaches the pump body surface 8. In Figure 4, there is shown a crank rotary position of the crank drive 32 which lies 50° before the top dead center of the rotary crank drive 32 illustrated in Figure 1. Thereby, the axis 37 is tilted with respect to the axis 39 of the pump body surface 8, whereby the tilting is effected oppositely to the tilting in Figure 2. Thereby the membrane 24 initially approaches the inlet opening 9 of the inlet channel 4, whereby in the illustrated rotary angle position of the crank drive 32 the inlet opening 9 is already closed by the elastically deformable membrane ring 26. Further, the pump chamber 38 is formed extending from the inlet opening

to the outlet opening 20 of the outlet channel 17 so that the pump medium preferably collects in the region of the outlet opening 20 of the outlet channel 17 upon the further rotary movement of the crank drive 32, whereby a complete pumping out of the pump medium out of the pump chamber 38 into the outlet channel 17 is effected.

By means of the early closing of the inlet opening 9 of the inlet channel 4 with the membrane ring 26 it is achieved that a dead space in the inlet channel 4 adjoining the pump chamber 38 is closed, so that pump medium present in the inlet channel 4 is not further compressed due to the further expulsion stroke of the crank drive and the expulsion stroke can be exploited entirely for compressing the pump medium which is to be pumped out via the outlet channel 17. Thereby it is particularly advantageous when the valve plate 10 is positioned in the inlet channel 4 near to the inlet opening 9, since thereby even before closure of the inlet opening 9 with the membrane ring 26, the dead volume is reduced. The outlet opening 20 of the outlet channel 17 is, in this exemplary embodiment, arranged in the region of the pump body surface 8 which the membrane 24 approaches last and which is attained by the membrane 24 at the earliest at the top dead center of the crank drive 32. Thereby it is attained that the outlet opening 20 is closed only after the completed expulsion stroke of the crank drive 32. So that the outlet opening 20 is not partly closed by the membrane ring 26 of the membrane 24, and thus the pump medium flow of the pump medium upon pumping out into the outlet opening 17 is not additionally choked, it is particularly advantageous that the middle point of the outlet opening 20 of the outlet channel 17 is arranged in an inner region of the pump body surface 8 which lies opposite to the membrane core 25 of the membrane 24.

The invention is not restricted to the described exemplary embodiments.

CLAIMS

1. Membrane pump (1) having a membrane (24) which can be actuated by a crank drive (32), which membrane bounds, together with a concave pump body surface (8), a pump chamber (38), an inlet channel (4) and an outlet channel (17) which open out at an inlet opening (9) and an outlet opening (20) in the pump body surface (8), the membrane (24) having a membrane core (25) and an elastically deformable membrane ring (26) and the membrane core (26) having a convex surface adapted to the pump body surface (8),
whereby
the inlet opening (9) is arranged in a region of the pump body surface (8) which the membrane (24) first approaches upon an expulsion stroke of the crank drive (32),
and
the elastically deformable membrane ring (26) closes the inlet opening (9) before the attainment of top dead center of the crank drive (32),
characterized in that,
an inlet valve is provided which is arranged in the region of the inlet opening (9) of the inlet channel (4).

2. Membrane pump according to claim 1,
characterized in that,
the inlet valve has a valve plate (10) which covers over the inlet opening (9).

3. Membrane pump according to claim 1 or 2,
characterized in that,
there is formed in the edge region of the inlet opening (9) a surrounding control edge (35) against which the elastically deformable membrane ring (26) closes the inlet valve.

4. Membrane pump according to any of claims 1 to 3, characterized in that,
the middle point of the inlet opening (9) lies at least approximately in the plane of rotation of the crank (31) of the crank drive (32).

5. Membrane pump according to any of claims 1 or 4, characterized in that,
the elastically deformable membrane ring (26) closes the inlet opening (9) at a crank rotary position of the crank drive (32) which is up to 90° before top dead center.

6. Membrane pump according to claim 5, characterized in that,
the elastically deformable membrane ring (26) closes the inlet opening (9) at a crank rotary position of the crank drive (32) which is 20° to 90° before top dead center.

7. Membrane pump according to any of claims 1 to 6, characterized in that,
the middle axis of the inlet channel (4) is orientated perpendicularly to the pump body surface (8).

8. Membrane pump according to any of claims 1 to 7, characterized in that,
the outlet opening (20) of the outlet channel (17) is arranged in a region of the pump body surface (8) which the membrane (24) approaches last and which is attained by the membrane (24) at the earliest at top dead center of the crank drive (32).

9. Membrane pump according to any of claims 1 to 8, characterized in that,
the middle point of the outlet opening (20) of the

outlet channel (17) is arranged in an inner region of the pump body surface (8) which lies opposite to the membrane core (25) of the membrane (24).

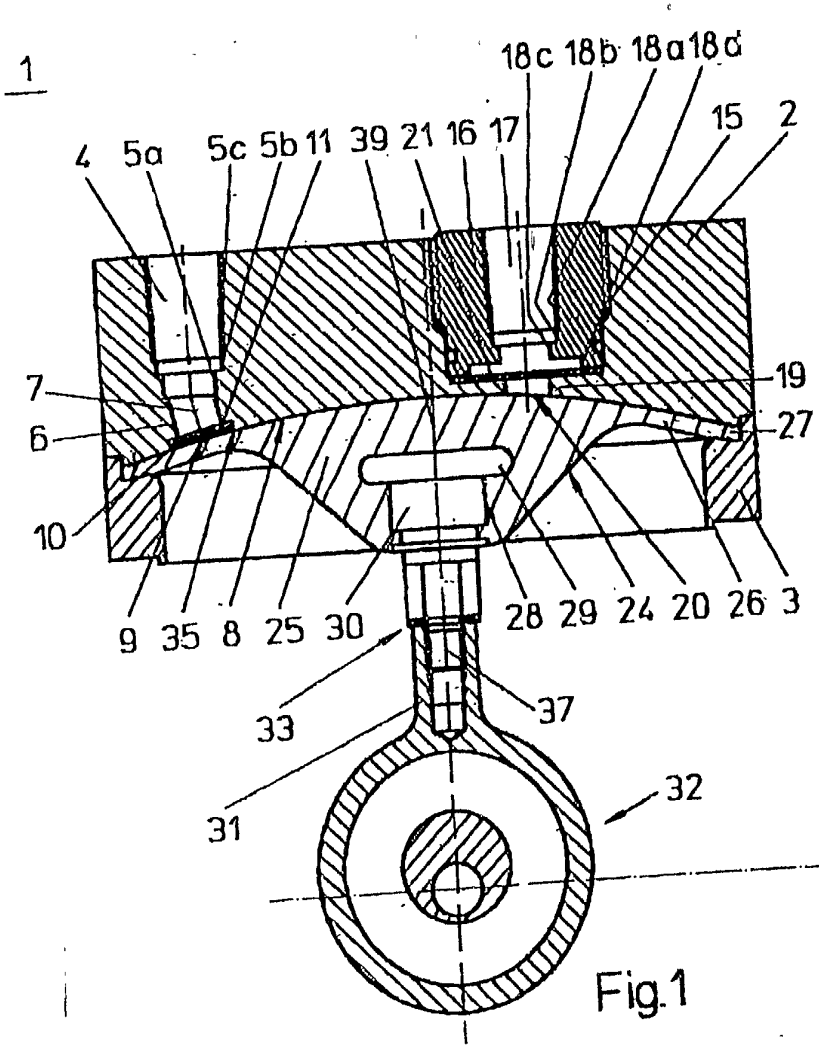

Fig.1

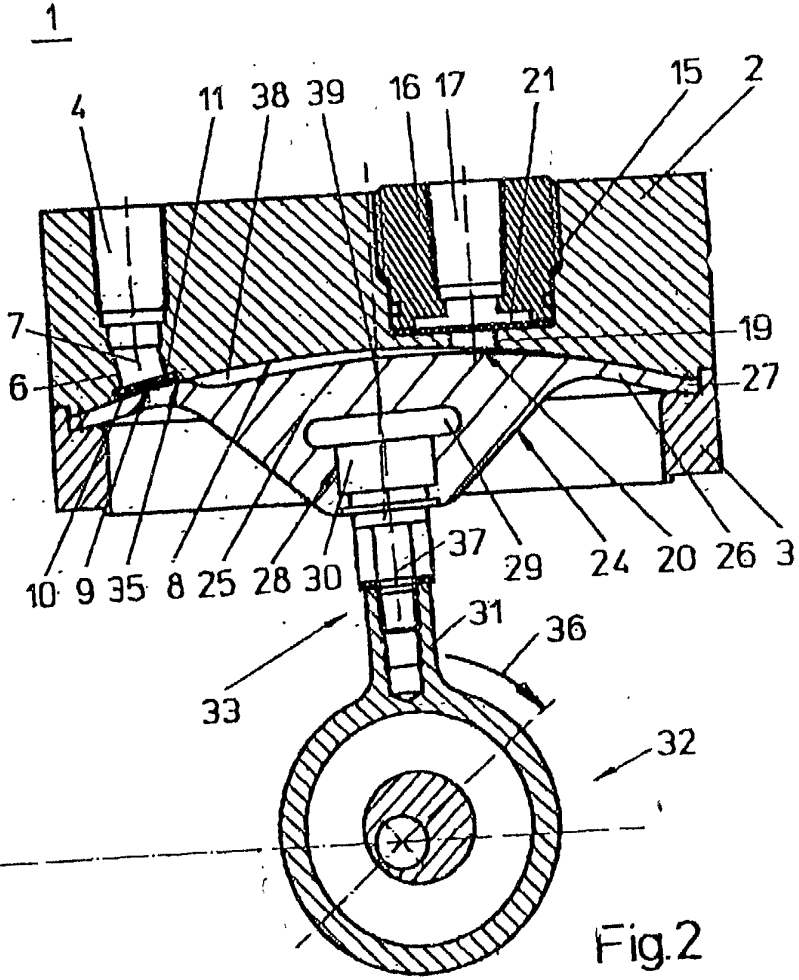

Fig.2

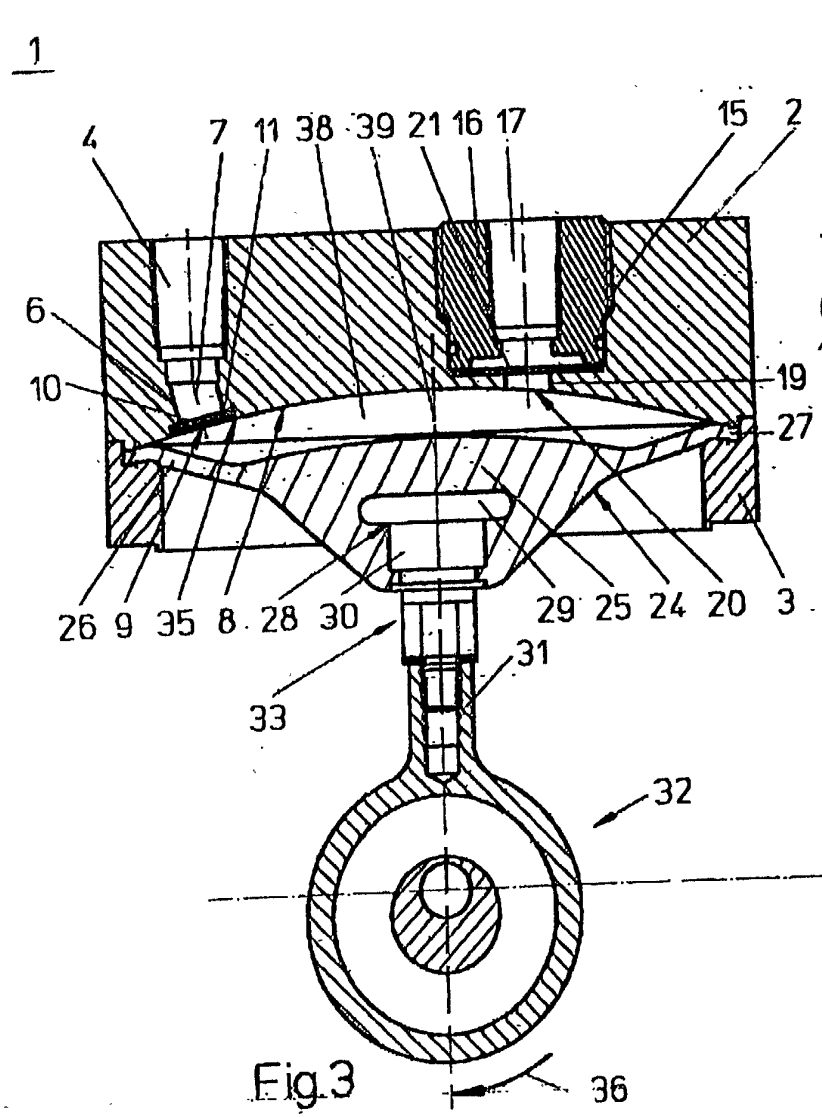

Fig.3

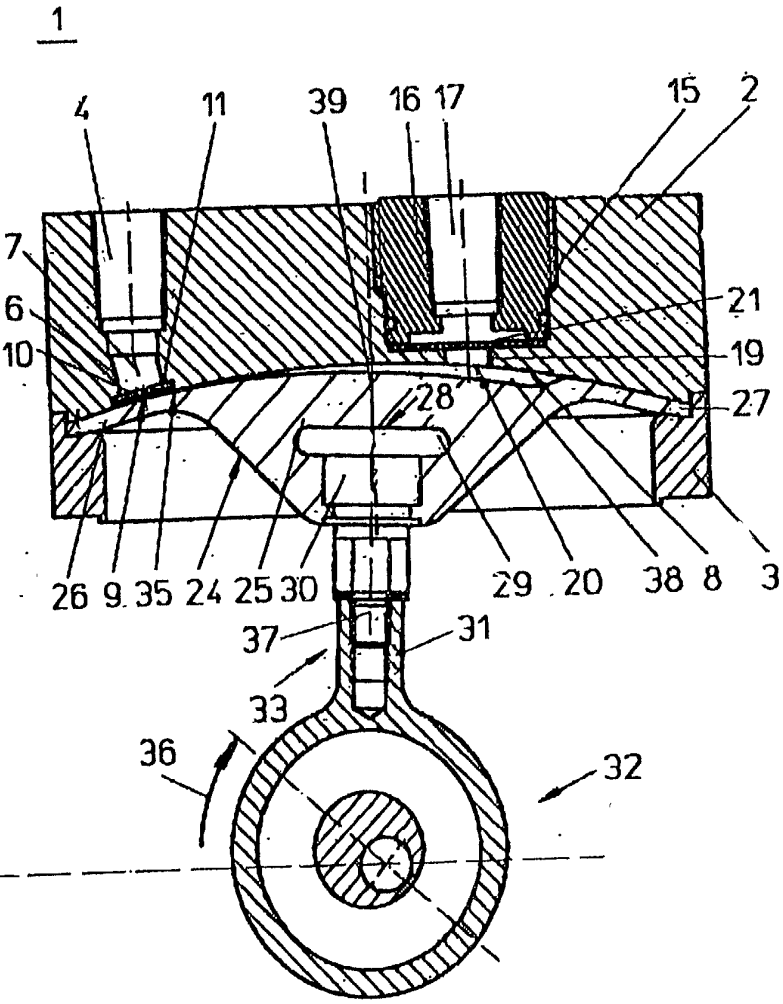

Fig.4

Docket No.
15028

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
MEMBRANE PUMP HAVING AN INLET OPENING CONTROLLED BY MEANS OF THE MEMBRANE

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on **28 April 2000** as United States Application No. or PCT International Application Number **PCT/EP00/03857**

and was amended on **20 November 2000** (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Not Claimed
199 19 908.6 (Number)	**Germany** (Country)	**30/April/1999** (Day/Month/Year Filed)	☐
(Number)	(Country)	(Day/Month/Year Filed)	☐
(Number)	(Country)	(Day/Month/Year Filed)	☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Richard L. Catania, Reg. No. 32,608;
Mark J. Cohen, Reg. No. 32,211;
Frank S. DiGiglio, Reg. No. 31,346;
Paul J. Esatto, Jr., Reg. No. 30,749;
Edward W. Grolz, Reg. No. 33,705;
Kenneth L. King, Reg. No. 24,223;
Leopold Presser, Reg. No. 19,827;
William C. Roch, Reg. No. 24,972;
John S. Sensny, Reg. No. 28,757;

Send Correspondence to:

SCULLY, SCOTT, MURPHY & PRESSER
400 Garden City Plaza
Garden City, New York 11530

Direct Telephone Calls to: *(name and telephone number)*
Edward W. Grolz (516) 742-4343

Full name of sole or first inventor
Gerhard Rinninger

Sole or first inventor's signature: Gerhard Rinninger — Date: 03-12-01

Residence
Lerchenweg 3, 87666 Pforzen, Germany

Citizenship
German DEY

Post Office Address
same as above

Full name of second inventor, if any
Oswald Seibold

Second inventor's signature: Oswald Seibold — Date: 11-12-01

Residence
Klessingweg 27, 80997 Munchen, Germany

Citizenship
German DEY

Post Office Address
same as above